

## **PREDICTION OF RAINFALL USING MACHINE LEARNING**

1. P.H.Swarna rekha,CSE,Sri Indu Institute of Engineering&Technology(SIET), Sheriguda, Ibrahimpatnam, Hyderabad
2. J.Pujitha ,assistant professor,CSE,SIET,Sheriguda,Ibrahimpatnam,Hyderabad
- 3.S.Kiran,assistant professor,CSE,SIET,Sheriguda,Ibrahimpatnam,Hyderabad
- 4.Sukha Akhila,Student,CSE,SIET,Sheriguda,Ibrahimpatnam,Hyderabad
5. Sula Kavya,Student,CSE,SIET,Sheriguda,Ibrahimpatnam,Hyderabad
6. Yatala Pooja,Student,CSE,SIET,Sheriguda,Ibrahimpatnam,Hyderabad

### **ABSTRACT:**

In India ,Agriculture is the key point for survival. For agriculture, rainfall is most important. These days rainfall prediction has become a major problem. Prediction of rainfall gives awareness to people and know in advance about rainfall to take certain precautions to protect their crop from rainfall. Many techniques came into existence to predict rainfall. Machine Learning algorithms are mostly useful in predicting rainfall. Some of the major Machine Learning algorithms are ARIMA Model (Auto-Regressive Integrated Moving Average), Artificial Neural Network, Logistic Regression, Support Vector Machine and Self Organizing Map. Two commonly used models predict seasonal rainfall such as Linear and NonLinear models. The first models are ARIMA Model. While using Artificial Neural Network (ANN) predicting rainfall can be done using Back Propagation NN, Cascade NN or Layer Recurrent Network. Artificial NN is same as Biological Neural Networks

### **INTRODUCTION:**

In today's situation, rainfall is considered to be one of the responsible factors for most of the significant things across the world. In India, agriculture is considered to be one of the important factors for deciding the economy of the country and agriculture is solely dependent on rainfall. Apart from that in the coastal areas across the world, getting to know the amount of rainfall is very much necessary. In some of the areas which have water scarcity, to establish rain water harvester, prior prediction of the rainfall should be done. This project deals with the prediction of rainfall using machine learning & neural networks. The project performs the comparative study of machine learning approaches and neural network approaches then accordingly portrays the efficient approach for rainfall prediction. First of all, pre-process is performed. Pre-process is the process of representing the data set in the form of several graphs such as bar graph, histogram etc. The prediction has been done using the data set which contains rainfall data from year 1901 to 2015 for different regions across the country. It contains month wise data as well as annual rainfall data for the same.

### **MOTIVATION:**

Rainfall information in the past helps farmers better manage their crops, leading to economic growth in the country. Prediction of precipitation is beneficial to prevent flooding that saves people's lives and property.

### **SYSTEM ANALYSIS**

#### **EXISTING SYSTEM**

Machine learning approach deals with predicting rainfall using machine learning approach. It finds the accuracy of the machine learning approach using two types of errors i.e., RE and RMSE. In these four major trends of machine learning are being used. The first one is called hybridization, which means multiple machine learning approaches are being used together and accordingly prediction is being done. The second one deals with improving the quality of dataset which is being used. Data

mining approach helps to find the hidden pattern, which will help to predict the rainfall correctly. This approach takes all the parameters, which affect the rainfall such as climate, wind speed etc. and predict the future rainfall. Customized, integrated and modified data mining technique is used to predict rainfall. Many climate variables are being taken to predict rainfall.

**PROPOSED SYSTEM:**

We have proposed ANN (ARTIFICIAL NEURAL NETWORK) based rainfall prediction and forecasting system to efficiently predict the rainfall and to do forecasting for upcoming years. It provides the better accuracy comparing to the existing approach. It consumes less time for huge amount of data.

**SYSTEM DESIGN:**

**SYSTEM ARCHITECTURE:**

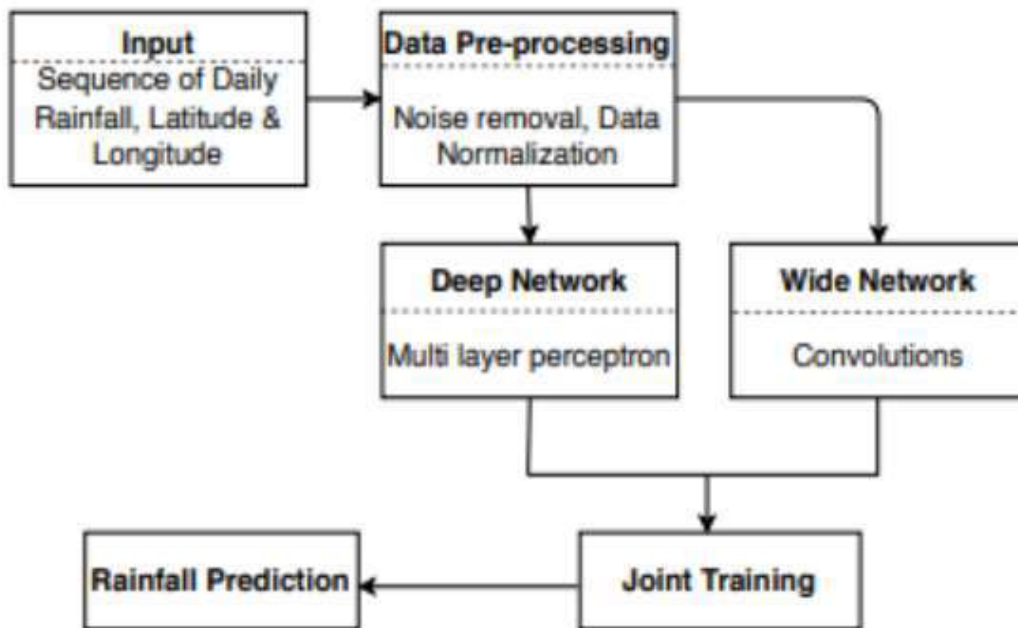


Fig 3.1 Architecture outline of the classification of rain fall prediction

The model takes sequence of daily rainfall intensities and geographical parameters, namely latitude and longitude as input. After initial pre-processing, input goes to a deep network, which is a ANN (ARTIFICIAL NEURAL NETWORK) and a wide network consists of convolutions. The model is trained using joint training approach, considering outputs from deep and wide networks simultaneously.

**FLOWCHART:**

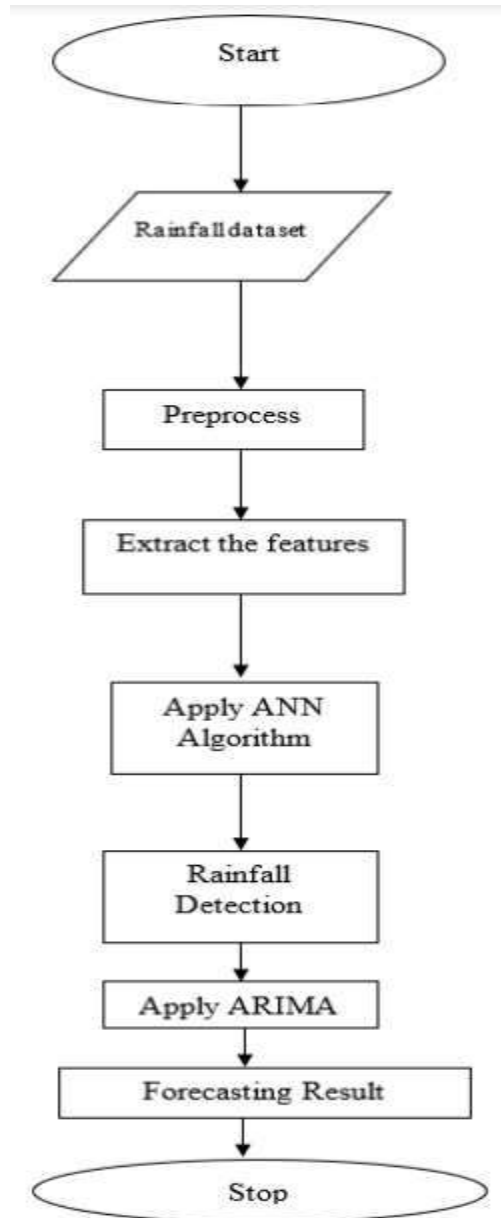


Fig 3.2 Flow Chart

**ALGORITHM APPLIED**

**ARTIFICIAL NEURAL NETWORK**

Artificial neural network model ANN is an adaptive system that changes its structure based on external or internal information that flows through the network during its learning phase. The neural network is neurons connected together with the output from one neuron becoming input to others until the final output is reached. The network learns when an example of a set of input data with known results/output are presented to it, the weighting factors are adjusted (either through human intervention or by a programmed algorithm) and these connection weights store the knowledge necessary to bring the final output closer to the known result (Haykin 1999). In this present study, ANN models with three training algorithms were developed to forecast the daily rainfall. Using the available data of the study area, trial and error approach has been employed in finalizing the present ANN structure. The Neuro solution version 5 (<http://www.nd.com>) has been used in the model development. The first ANN model (A)

was trained using MLP backpropagation algorithm network with simple structure, four nodes in the input layer, single hidden layer with seven nodes and one node in the output layer. Input to the model is the present-day rainfall data ( $t$ ) and the 3-day lagged rainfall [ $(t-1)$  ( $t-2)$  ( $t-3$ )], while the output is rainfall of the next day ( $t+1$ ). The transfer function used is the sigmoid function with 400 numbers of epochs. In the second ANN model (B), the radial basis function (RBF) was used for training the network. The input and the output of training data set were kept same as MLP network. However, the transfer function, TanhAxon, was used. The third ANN model (C) was trained using time-lagged recurrent networks (TLRNs). Data used to train the model was the same as the previous two models (A and B). In the TLRN algorithm, the increased number of nodes in the hidden layer reduced the performance and hence the number of nodes in the hidden layers was reduced to two. For all the networks, the number of hidden layers and number of neurons in each layer were found by trial and error. Out of 471 years of rainfall data, 35 years of data are used for training and remaining 12 years are used for testing; this length is achieved through a trial-and-error modelling approach.

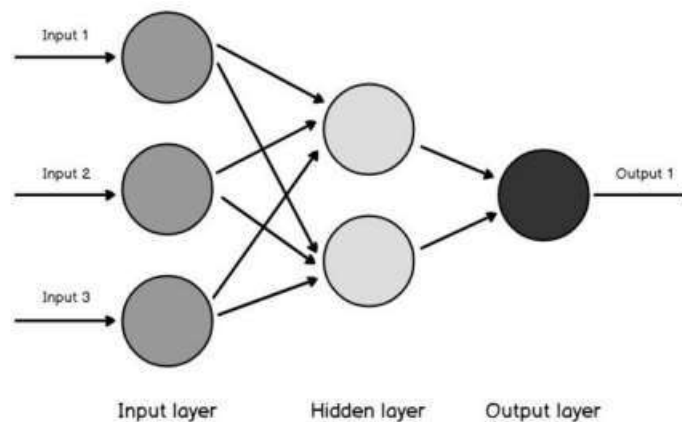


Fig 4.1 Artificial Neural Network

**ARIMA forecast model:** ARIMA is an acronym that stands for Auto Regressive Integrated Moving Average. It is a class of model that captures a suite of different standard temporal structures in time series data.

Components of ARIMA: □ ARIMA has three components – AR (autoregressive term), I (differencing term) and MA (moving average term). Let us understand each of these components □ AR term refers to the past values used for forecasting the next value. The AR term is defined by the parameter ‘p’ in arima. □ MA term is used to define number of past forecast errors used to predict the future values. The parameter ‘q’ in arima represents the MA term. ACF plot is used to identify the correct ‘q’ value. □ Order of differencing specifies the number of times the differencing operation is performed on series to make it stationary. Test like ADF and KPSS can be used to determine whether the series is stationary and help in identifying the d value. Steps of ARIMA □ Load the data: This step will be the same. Load the data into your notebook □ Preprocessing data: The input should be univariate, hence drop the other columns □ Fit Auto ARIMA: Fit the model on the univariate series □ Predict values on validation set: Make predictions on the validation set □ Calculate RMSE: Check the performance of the model using the predicted values against the actual values.

### Building Model

We apply a convolutional layer to capture such combinations. In addition to this, to make our model more generalized with respect to different atmospheric conditions, we are using geographical parameters namely, longitude and latitude while designing and developing our model.

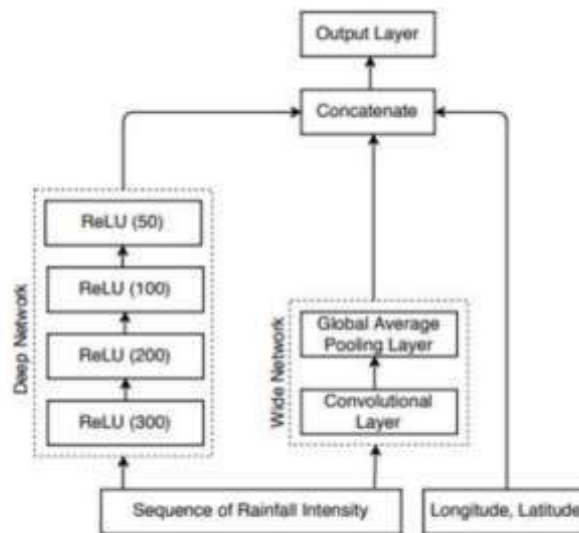


Fig:5.2 ANN model

## CONCLUSIONS

This project represented the Deep Learning Approach for predicting the rainfall by using the ANN (ARTIFICIAL NEURAL NETWORK). Comparing the present architecture with other state approaches. This project provided a study of different types of methodologies used to forecast and predict rainfall and issues that could be found when applying different approaches to forecasting rainfall. Because of nonlinear relationships in rainfall datasets and the ability to learn from the past, Artificial Neural Network makes a superior solution to all approaches available.

## FUTUREWORK:

The future work of the project would be the improvement of architecture for light and other weather scenarios. Also, can develop a model for small changes in climate in future. An algorithm for testing daily basis dataset instead of accumulated dataset could be of paramount Importance for further research.

## REFERENCES:

1. Rainfall dataset of our country is taken from kaggle website <https://www.kaggle.com/rajanand/rainfall-in-india>
2. Mosavi, A., Ozturk, P., & Chau, K. W. (2018). Flood prediction using machine learning models: Literature review. *Water (Switzerland)*, 10(11). <https://doi.org/10.3390/w10111536>
3. Janani, B; Sebastian, P. (2014). Analysis on the weather forecasting and techniques. *International Journal of Advanced Research in Computer Engineering & Technology*, 3(1), 59–61. <http://ijarcet.org/wp-content/uploads/IJARCETVOL-3-ISSUE-1-59-61.pdf>
4. Chaudhari, M. S., & Choudhari, N. K. (2017). Open Access Study of Various Rainfall Estimation & Prediction Techniques Using Data Mining. *American Journal of Engineering Research (AJER)*, 7, 137–139. [http://www.ajer.org/papers/v6\(07\)/Q0607137139.pdf](http://www.ajer.org/papers/v6(07)/Q0607137139.pdf)
5. Aakash Parmar, Kinjal Mistree, M. S. (2017). Machine Learning Techniques for rainfall prediction: A Review. *International Conference on Innovations in Information Embedded and Communication Systems (ICIIECS)*. [https://www.researchgate.net/profile/Aakash\\_Parmar4/publication/319503839\\_Machine\\_Learning\\_Techniques\\_For\\_Rainfall\\_Prediction\\_A\\_Review/links/59afb922458515150e4cc2e4/Machine\\_Learning\\_Techniques-For-Rainfall-Prediction-A\\_Review.pdf](https://www.researchgate.net/profile/Aakash_Parmar4/publication/319503839_Machine_Learning_Techniques_For_Rainfall_Prediction_A_Review/links/59afb922458515150e4cc2e4/Machine_Learning_Techniques-For-Rainfall-Prediction-A_Review.pdf).